


MOBILE REFUELLING IBC'S

CGSB 43.146-2002

CYLINDRICAL

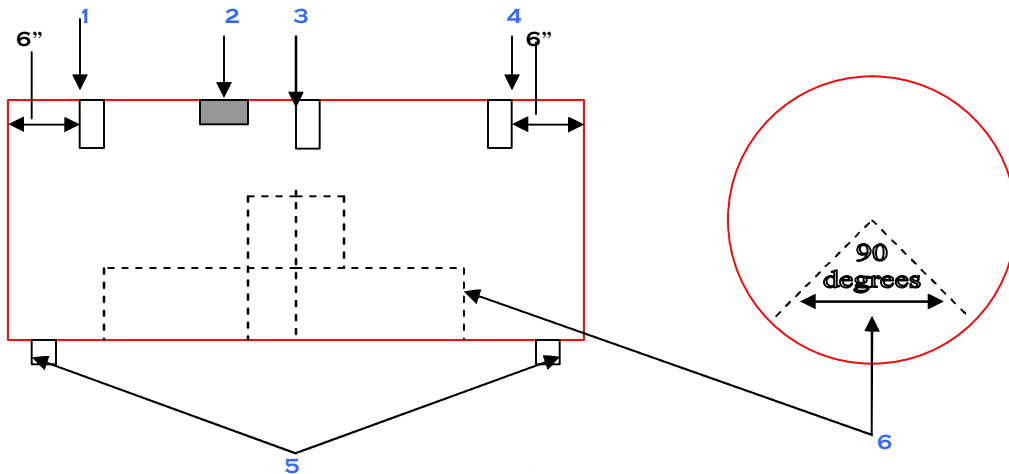

1	2" Pump outlet c/w reinforced plate
2	UN/CGSB label
3	2" Emergency vent
4	2" Fill c/w vented cap
5	Loose Saddles (2)
6	Surge baffle

MATERIAL (GAUGE)	TANK CAPACITY	DIAMETER	LENGTH	APPROX WEIGHT
10	225L (50gal)	30"	20"	82 kg
10	450L (99gal)	30"	40"	105 kg
10	900L (200gal)	36"	60"	177 kg
10	1360L (300gal)	38"	72"	214 kg
10	2200L (500gal)	50"	72"	305 kg

Note: We can manufacture any size up to 2200L

General Information

This tank meets or exceeds CGSB regulations. Tanks primed with rust deterrent primer prior to applying 2 coats of red enamel. Also include a vented fill cap c/w pressure relief and emergency venting and interior tank baffles. Transport Canada approved and tested to withstand the stresses of working in the field. Tank comes complete with bolt down straps and loose saddles to stabilize the tank.

Options

We can supply you with a pump and/or meter to go with your new tank, completing your package and simplifying the ordering process. Whether you add the options or purchase the base tank we know that this cost-effective and practical method of hauling fuel will suit all your applications!

HASSCO Industries Inc. London, Ontario Canada
ISO 9001 Registered

All dimensions and weights are approximate.

All Text, Images and Drawings ©2006 HASSCO Industries Inc. and are subject to change without notice.