


U S E D O I L T A N K ULC S652

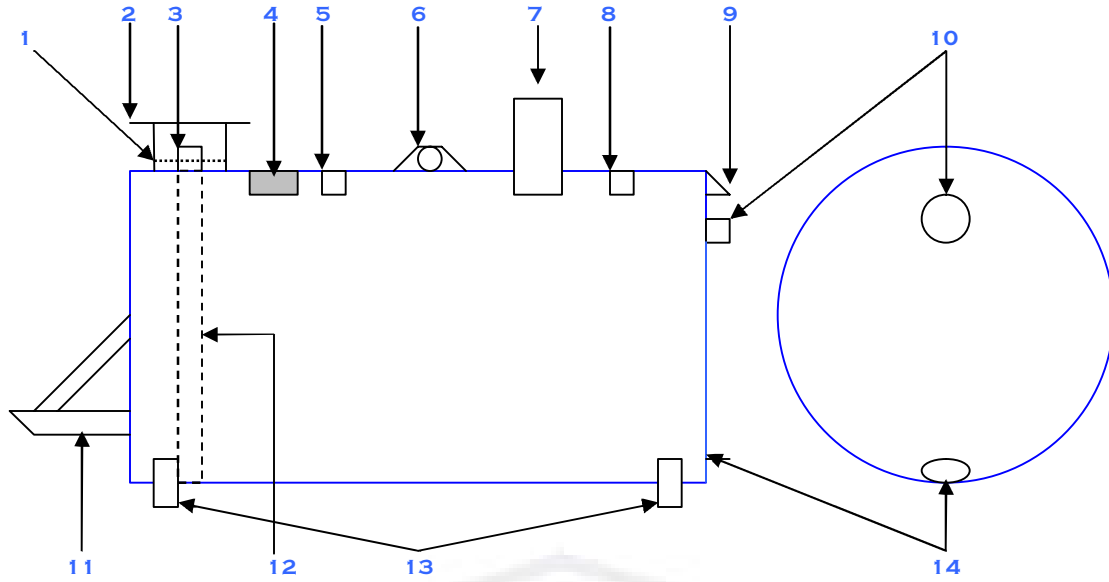

1	Filter Screen
2	Overfill containment chamber c/w fill
3	2" male cam-lock
4	ULC label
5	2" flange
6	Lift lug
7	4" emergency vent
8	2" flange
9	Interstice emergency vent
10	Vacuum gauge
11	Steps (on 500-1000 gallon tanks)
12	Suction pipe
13	Legs
14	1" drain

MATERIAL (GAUGE)	TANK CAPACITY	DIAMETER	LENGTH	WEIGHT (LBS)
14	450L (100Gal)	30"	48"	200
14	1100L (250Gal)	38"	60"	500
14	1360L (300Gal)	38"	72"	600
12	2200L (500Gal)	50"	72"	1000
12	4500L (1000Gal)	50"	144"	2000

General Information

This tank meets or exceeds ULC S652 regulations for used oil storage. This tank is built rugged with an all steel double wall construction. Large drain/fill containment chamber complete with debris straining screen. For your convenience a Quick-connect cam-lock suction evacuation system is included. Tank is treated with a rust deterrent primer prior to 2 coats of epoxy. Platform is standard on 500 and 1000 gallon versions only and can be custom ordered on other capacities.

Options

This tank is available in a number of colours. Remote fill systems and hi-level audible alarms can be supplied with these tanks. For more information please contact us!

HASSCO Industries Inc. London, Ontario Canada
ISO 9001 Registered

All dimensions and weights are approximate.

All Text, Images and Drawings ©2006 HASSCO Industries Inc. and are subject to change without notice.